



### 24" IPS monitor with ultra-slim bezel and ultra-flat front

Stylish edge-to-edge design makes the ProLite XU2493HSU perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design.

Available also with height adjustable stand : [ProLite XB2493HSU-B1](#)



#### IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



#### Flicker-free + Blue light

The ultimate solution for the comfort and health of your eyes. Flicker-free monitors with the blue light reducer function substantially reduce the strain and fatigue caused by flickering and blue light emittance of regular monitors.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	ultra slim
<b>Diagonal</b>	23.8", 60.5cm
<b>Panel</b>	IPS panel technology LED, matte finish
<b>Native resolution</b>	1920 x 1080 @60Hz (2.1 megapixel Full HD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	250 cd/m <sup>2</sup>
<b>Static contrast</b>	1000:1
<b>Advanced contrast</b>	80M:1
<b>Response time (GTG)</b>	4ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	16.7mIn (sRGB: 96%; NTSC: 72%)
<b>Horizontal Sync</b>	30 - 84kHz
<b>Viewable area W x H</b>	527 x 296.5mm, 20.7 x 11.7"
<b>Pixel pitch</b>	0.275mm
<b>Colour</b>	matte

## 02 INTERFACES / CONNECTORS / CONTROLS

<b>Signal input</b>	VGA x1 (1920 x 1080 @60Hz) HDMI x1 (1920 x 1080 @75Hz) DisplayPort x1 (1920 x 1080 @75Hz)
<b>USB HUB</b>	x2 (v.2.0)
<b>Headphone connector</b>	yes

## 03 FEATURES

<b>Blue light reducer</b>	yes
<b>Flicker free</b>	yes
<b>Extra</b>	i-style Colour
<b>OSD languages</b>	EN, DE, FR, ES, IT, PT, RU, JP, NL, PL
<b>Control buttons</b>	Signal / Auto Adjust, + / Volume, - / Eco, Menu, Power
<b>User controls</b>	picture adjust (contrast, brightness, i-Style Colour, adv. acontrast, Eco, OD, X-Res technology), image settings (auto adjust, pixel clock, phase, H. position, V. position, sharp and soft, aspect), colour settings (gamma, 6-axis, colour temperature), OSD (OSD H. position, OSD V. position, OSD time, language), extra (reset, DDC/CI, signal select, audio source, HDMI range, opening logo, LED, information, volume)
<b>Speakers</b>	2 x 2W
<b>Convenience</b>	Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX

## 04 MECHANICAL

<b>Display position adjustments</b>	tilt
<b>Tilt angle</b>	21.5° up; 3.5° down
<b>VESA mounting</b>	100 x 100mm

## 05 ACCESSORIES INCLUDED

<b>Cables</b>	power, USB, HDMI
<b>Other</b>	quick start guide, safety guide

## 06 POWER MANAGEMENT

Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	19W typical, 0.5W stand by, 0.5W off mode

## 07 SUSTAINABILITY

Regulations CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, ENERGY STAR®

Energy efficiency class (Regulation (EU) 2017/1369)

F

REACH SVHC

above 0.1%: Lead


## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D 539.5 x 415 x 199.5mm

Box dimensions W x H x D 620 x 415 x 124mm

Weight (without box) 3.3kg

EAN code 4948570117499

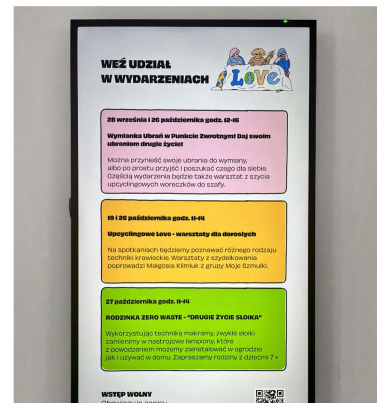

AN IIYAMA CASE STUDY  
SUPPORTING ECOLOGICAL EDUCATION  
AT WARSAW'S "EKOCENTRUM"  
- TURNING POINT™ #WITHIYAMA

**iiyama**  
professional displays

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED

27.05.2026 20:57:56