








Product type	Computer power supply
Format	ATX 2.31
Series	Ultimate
Supply voltage	200-240 V
Power consumption	< 5 A
Efficiency	> 80 %
80 PLUS compatibility	Yes
80 PLUS certificate	Bronze
Current on the +3.3V rail	13 A
Current on the +5V rail	13 A
Maximum load on +3.3V and +5V line	105 W
Current on the +12V rail	28 A
Maximum load on 12V line	679 W
Maximum power	800 W
Mainboard Power Connector	24-pin
Power connector ATX12V P4	None
Power connector EPS12V 8 pin	1 pc (4 + 4-pin)
Power connector PCI-E 6 pin	1 pc
Power connector PCI-E 6+2 pin	1 pc
Power connector PCI-E 8 pin	None
Molex connector	2 pcs
Mini-Molex connector	1 pc
SATA connector	6 pcs
Modular power supply	No
PFC filter	Active
Mechanical switch	Yes
Ground wire	Yes
OVP	Yes
OCP	Yes
OPP	Yes
OTP	Yes
SCP	Yes
UVP	Yes
Power supply connector	IEC C14
Fan size	120 mm
Fan adjustments	Automatic
Cable length	45 - 75 cm
The cable plug #1	Hybrid standard C/E/F (CEE 7/7)
The cable plug #2	IEC C13
Power cable included	Yes

)				
	Material	Galvanized steel		
	Product color	Black		
	MTBF	100000 h		
	Temperature	5 - 50 °C		
	Package	EcoBox		
	Product size (L x W x H)	140 x 150 x 85 mm		
	Package size (L x W x H)	222 x 155 x 95 mm		
	Net weight	1.62 kg		
	Gross weight	1.69 kg		
	CE compatibility	Yes		
	FCC compatibility	No		
	RoHS compatibility	Yes		
	REACH compatibility	Yes		
	Included accessories	Cable IEC C13 1 m		
	EAN code	5901720136381		
	Warranty	36 months		

3





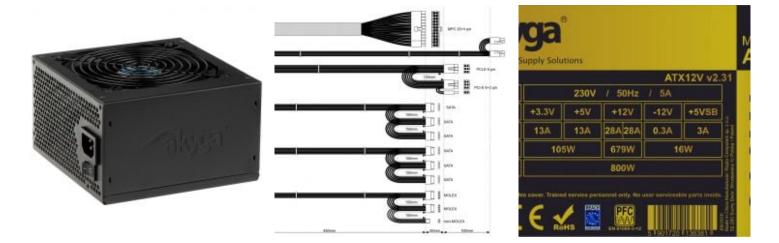

Description

3

The Akyga AK-U4-800 power supply is a stable and, most importantly, reliable power source. These features are especially important for anyone who relies on their computer equipment. Regardless of whether it is used for work or study. What's more, the power supply is also characterised by high efficiency and energy saving, which are increasingly important nowadays. This is proven by **the 80 PLUS Bronze certification**, which shows that the efficiency of the power supply reaches up to 88%.

The power supply meets the requirements of advanced PC systems. More complex configurations need a strong +12 V line, which is why this model features up to **two powerful +12 V lines**. Each of these is able to deliver a current capacity of 28 A. Thus, the connected components, such as CPU or graphics cards, have a guaranteed a high level of power stability. Furthermore, the PSU is equipped with **two PCI-E connectors**, which can also handle graphics cards in a **multi-GPU system**. This is extremely useful when you want to build a PC unit for graphics work or gaming. Another advantage of the power supply is **the quiet fan on hydraulic bearings**, which adjusts its speed as required and thus ensures adequate cooling. This not only ensures the proper operation of the components, but also the reliability of the PSU.


The Ultimate PSU series is equipped with long cables, which simplify the installation especially inside large ATX cases. What's more, they come with a large set of connectors which allows to power multiple components and memory. Apart from the previously mentioned PCI-E 6-pin and 6+2-pin connectors, this model comes with 2 MOLEX connectors, 6 SATA connectors, 1 mini-MOLEX and EPS12V 4+4-pin connector each as well as a universal 24-pin motherboard connector.

The AK-U4-800 power supply is an extremely safe device. Thanks to such protections as:

- OCP (overcurrent protection),
- **OVP** (over-voltage protection),
- UVP (under-voltage protection),
- SCP (short circuit protection),
- **OTP** (temperature protection),
- **OPP** (overload protection).

You can be sure that your desktop computer is safe and used components are properly protected. At the same time, their operation will run without any undesired disturbances or hindrances.

Cable map

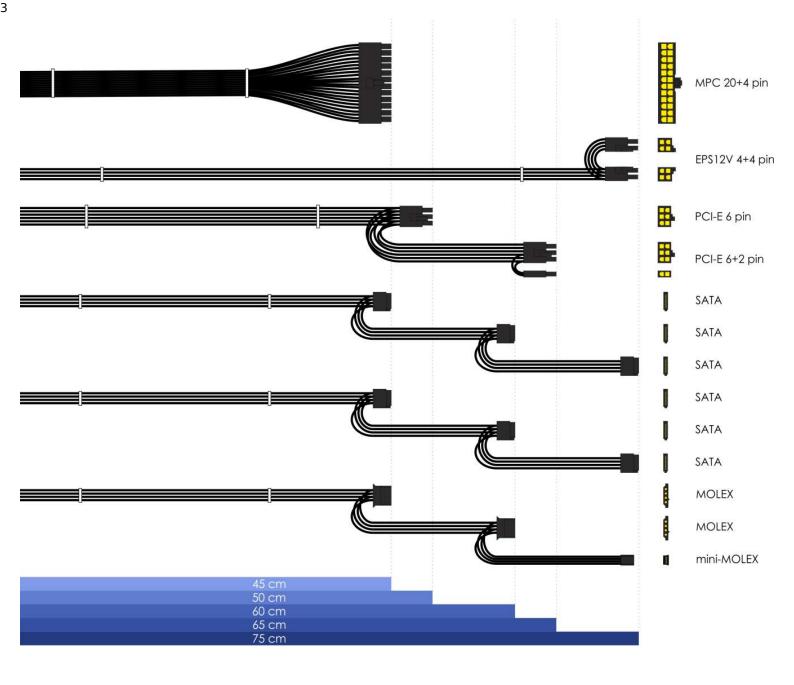

Nameplate

aky Professional Power S	ga	B tions				Model: AK-L	J4-800
	ATX12V v2.31					1	
AC INPUT		230V	/ 50Hz	/ 5A			
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5VSB		
MAX CURRENT	13A	13A	28A 28A	0.3A		l Poland	
MAX COMBINED	10	5W	679W	16	Compute		V ies
TOTAL POWER		A BOOR					Se
BRONZE	is cover. Traine	d service pers	onnel only. No o PFC EN 61000-3-12	user serviceab	le parts inside. B3588 Bage in Chima Mandadarin 136381 II	62-200 Suchy Dwór, Wrodew	UL1