



**Get ahead with the G2745HSU Black Hawk with IPS Panel Technology and 1ms MPRT**


Indulge in exceptional gaming excellence with the 27" G2745HSU Black Hawk monitor. This display boasts IPS panel technology, a 100Hz refresh rate, and an ultra-swift 1ms MPRT response time. Elevate your gaming adventure to the next level, thanks to the Black Tuner function, ensuring crystal-clear visibility even in the darkest scenes.

Available also with height adjustable stand : [G-Master GB2745HSU-B2 \(1920x1080\)](#) and [G-Master GB2745QSU-B2 \(2560x1440\)](#)



1ms

Fast response time is key to ultra-smooth gaming. It reduces ghosting and blurring providing the user with an improved graphic performance.

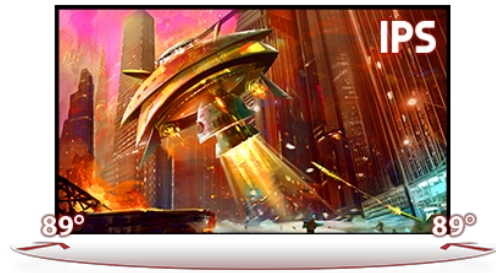

IPS TECHNOLOGY

Covering 100% of the sRGB colour range, this IPS panel provides outstanding colour accuracy and wider viewing angles guaranteeing high-fidelity, vivid battleground scenes.

## 01 DISPLAY CHARACTERISTICS

Diagonal	27", 68.5cm
Panel	IPS, matte finish
Native resolution	1920 x 1080 @100Hz (2.1 megapixel)
Aspect ratio	16:9
Panel brightness	300 cd/m <sup>2</sup>
Static contrast	1300:1
Advanced contrast	80M:1
Response time (MPRT)	1ms
Viewing zone	horizontal/vertical: horizontal°/vertical 178°, right/left: 0°/0°, up/down: 0°/0°
Colour support	16.7mln
Horizontal Sync	30 - 110kHz
Viewable area W x H	597.7 x 335.7mm, 23.5 x 13.2"
Pixel pitch	0.311mm
Colour	matte, black

## 02 INTERFACES / CONNECTORS / CONTROLS

Signal input	HDMI x1 (v.1.4) DisplayPort x1 (v.1.2)
USB HUB	x2 (v.2.0 DC5V, 500mA)
HDCP	yes
Headphone connector	yes

## 03 FEATURES

Blue light reducer	yes
Flicker free	yes
Adaptive Sync support	Adaptive Sync - 1920 x 1080 @48-100Hz
Extra	i-Style Colour
OSD languages	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Control buttons	Power, Menu, Volume, Black Tuner / MBR / Adaptive Sync / Night Mode, Input Select / Exit
User controls	picture adjust (contrast, brightness, OD, AC, Eco, black tuner, colour saturation, MBR, AdaptiveSync), input source, audio settings (volume, mute audio), user modes, colour settings (6-Axis, gamma, blue light reducer, colour temperature, user preset), image adjust (i-Style Colour, sharp and soft, RGB range, video mode adjust), language, setup menu (OSD h. position, OSD v. position, OSD time, opening logo, LED), display information, recall
Speakers	2 x 2W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

## 04 MECHANICAL

Display position adjustments	tilt
Tilt angle	22° up; 4° down
VESA mounting	100 x 100mm
Cable management system	yes

## 05 ACCESSORIES INCLUDED

<b>Cables</b>	power (1.5m), USB (1.5m), HDMI (1.5m)
<b>Other</b>	quick start guide, safety guide

## 06 POWER MANAGEMENT

<b>Power supply unit</b>	internal
<b>Power supply</b>	AC 100 - 240V, 50/60Hz
<b>Power usage</b>	22W typical, 0.5W stand by, 0.3W off mode

## 07 SUSTAINABILITY

<b>Regulations</b>	CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA
<b>Energy efficiency class (Regulation (EU) 2017/1369)</b>	E
<b>REACH SVHC</b>	above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

<b>Product dimensions W x H x D</b>	611.5 x 434 x 192.5mm
<b>Box dimensions W x H x D</b>	688 x 125 x 465mm
<b>Weight (without box)</b>	3.9kg
<b>Weight (without stand)</b>	3.4kg
<b>Weight (with box)</b>	5.4kg
<b>EAN code</b>	4948570124725

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED