

DATA SHEET

ROOM SOLUTION: RALLY BAR MINI + TAP IP

Logitech Rally Bar Mini features a 4K-capable camera with motorized pan and tilt, three room-filling speakers, and a sensitive microphone array, all in a sleek enclosure with integrated cable management. Available Wall and TV Mounts offer versatile installation options for rooms and mobile carts.

With a 10.1" touch display, Logitech Tap IP delivers an easy user experience that's always ready for the next meeting.

Set up your room for leading video conferencing platforms, including Zoom Rooms, RingCentral, Microsoft Teams on Android, and others*.

ALL-IN-ONE APPLIANCE SOLUTION FOR SMALL MEETING OR HUDDLE ROOMS

Add video conferencing to any small meeting or huddle room with this universal video conferencing appliance kit featuring the all-in-one Rally Bar Mini and the 10.1" Tap IP touch controller. Leverage the built-in compute to run video conferencing applications directly on the device.

Meetings start with just one touch with Tap IP, a network-connected touch controller for Logitech room solutions.

Take advantage of its single Power over Ethernet (PoE) connection and variety of mounting options to install the touch controller anywhere in the room.

Prevent accidental disconnections thanks to built-in cable retention and strain relief, and be confident that each room stays ready for the next video meeting.

PRODUCT FEATURES



PREMIER ALL-IN-ONE VIDEO BAR FOR SMALL AND HUDDLE ROOMS

Simplicity meets versatility with Rally Bar Mini, Logitech's most advanced all-in-one video bar for small rooms and huddle spaces. A 4K-capable motorized pan and tilt lens provides expansive 163° horizontal x 110° vertical room coverage for comfortable framing, even when people sit close to the camera.

CLEAN AND SECURE CABLING

Route cables from above or below: thoughtful cable management hides cable clutter and keeps connections tight. This minimizes visible cabling, prevents downtime due to accidental disconnections, and supports mounting positions above and below the display.

SOUNDS AWESOME


High-performance drivers, adaptive beamforming mics, and a patented anti-vibration enclosure combine rich sound with exquisite sensitivity up to 15 feet (4.5 meters). Add up to two additional mic pods for even greater coverage.

START MEETINGS WITH A TAP

Meetings start with just one touch with Tap IP, a network-connected touch controller that's easy to use and simple to set up.

MANAGEMENT AND INSIGHTS

Monitor, manage, and get business insights into how your rooms are being used with Logitech Sync.

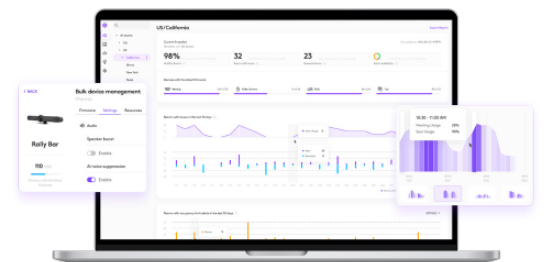

ACCESSORIES & TECH SPECS

RECOMMENDED ACCESSORIES



Tap Riser Mount
Elevated table mount with swivel and cable management



Tap Wall Mount
Space-saving wall mount with cable management



Tap Table Mount
Swiveling table mount with cable management



Tap Scheduler
Purpose-built scheduling panel for meeting rooms



Scribe
Effortlessly share whiteboards into video meetings with Logitech Scribe, an AI-powered whiteboard camera



Swytch
Connect a laptop to a room system's AV equipment for use with any video meeting or webinar.



Rally Mic Pod
Modular microphones with RightSound™ for Rally, Rally Bar, and Rally Bar Mini



Rally Mic Pod Mount
Anchors Rally Mic Pod to a table or ceiling, with cable management for a clean installation.



Rally Mic Pod Hub
Customize microphone placement for most any conference table configuration



Rally Mic Pod Extension Cable
10 meter extension cable.



TV Mount for Video Bars
Attach Rally Bar, Rally Bar Mini, or Rally Camera to almost any display with VESA mounting points.



Wall Mount for Video Bars
VESA-compatible mounting kit for Rally Bar and Rally Bar Mini.

TECH SPECS

TAP IP - GENERAL	RIGHTSENSE TECHNOLOGIES
Touch Screen: 257 mm (10.1 in) diagonal screen with 14° display angle Resolution: 1280 x 800 Cabling: Power over Ethernet (PoE) cable (not included), IEEE 802.3af Type 1, Class 3 device Cable Management: Internal cable retention and strain relief system Ethernet: 10/100mbps Wi-Fi: 802.11a/b/g/n/ac Device Management: Logitech Sync Color: Graphite Mounting: 100 mm x 100 mm VESA FDMI Dimensions (H x W x D): 58 mm (2.3 in) x 244 mm (9.6 in) x 179 mm (7.0 in)	RightLight: Renders natural skin tones for each participant. RightSight: Maintains persistent room awareness and detects human figures to auto-frame participants. RightSound: Distinguishes speech from other sounds to auto-level voices while suppressing background noise and echo.
RALLY BAR MINI - GENERAL	RALLY BAR MINI - INTERFACES
Built-in Components: 6 beamforming microphones, motorized pan and tilt camera with 4x digital zoom, 3 speakers, AI Viewfinder, cable management & retention system, table stand, Logitech CollabOS platform Enclosure: All-in-one enclosure with integrated table stand and patented speaker suspension system Device Management: Logitech Sync Displays Supported: 2 Display Resolution: Up to 4k	HDMI Out: 2 HDMI In: 1 USB: 3x Type A, 1x Type C Network: 10/100/1G Ethernet WiFi: 802.11a/b/g/n/ac (MIMO) Accessory Audio Input: Yes (for optional Rally Mic Pod, Rally Mic Pod Hub, and Rally Mic Pod Extension Cable) Remote Control: Bluetooth® Low Energy

PRODUCT SPECS & LINKS

RALLY BAR MINI - CAMERA	RALLY BAR MINI - MICROPHONES	RALLY BAR MINI - DIMENSIONS	
Resolution: 4K, 1440p, 1080p, 900p, 720p, and SD at 30fps Pan: Motorized $\pm 25^\circ$ Tilt: Motorized $\pm 15^\circ$ Zoom: 4X HD digital zoom Diagonal Field of View: 120° Horizontal Field of View: 113° Vertical Field of View: 80.7° Total Room Coverage: 163° Horizontal x 110° Vertical	Frequency Response: 90Hz–16kHz Sensitivity: $>-36\text{dBFS} \pm 1\text{dB}$ @ 1Pa Microphone Data Rate Output: 48 kHz Pickup Range: 4.5m (15 ft) Beamforming Elements: Six omnidirectional digital MEMS microphones forming five adaptive acoustic broadside beams Audio Processing: AEC (Acoustic Echo Cancellation), VAD (Voice Activity Detector) Noise Suppression: AI filter Add-on Mics: Supports up to 2 additional Rally Mic Pods	Height: 91.4 mm (3.6 in) Width: 719 mm (2.31 ft) Depth: 101 mm (3.98 in) Lens Depth: 18.5 mm (0.73 in) Weight: 4.03 kgs (8.88 lbs)	
		KIT COMPONENTS	
		Logitech Rally Bar Mini Logitech Tap IP	
RALLY BAR MINI - SPEAKERS	RALLY BAR MINI - SECURITY	PACKAGE CONTENTS	
Woofer: 1x 70 mm (2.7 in) Mid-range: 2x 38 mm (1.5 in) Output: 90dB SPL @1W, 99dB SPL @8.0W, both $\pm 2\text{dB}$ at $\frac{1}{2}$ meter Sensitivity: $86 \pm 2\text{dB}$ SPL at 1W, $\frac{1}{2}$ meter THD: 1kHz $< 2\%$ Speaker sampling rate: 48 kHz	Full Disk Encryption: AES-128 Data Encryption: Symmetric Keys, PKI Device Identity: Protected by device attestation Device Access: Authenticated using API Key Protection: Arm TrustZone, RMP	Rally Bar Mini Logitech Rally Bar Mini video bar Power supply Cables Lens caps Remote control User documentation	Tap IP Logitech Tap IP touch controller VESA mounting screws (4) Microfiber Cloth Documentation
RALLY BAR MINI - POWER & CABLES	*CERTIFICATIONS & COMPATIBILITY	WARRANTY	
Power Supply: Auto-sensing Operating voltage/power: 100-240V, 19V, 4.74A Power Supply Dimensions: 127 mm x 51 mm x 30 mm DC Cable: 1.5m (4.9 ft) AC Cable: 1m (3.28 ft) HDMI 1.4 cable: 2m (6.5 ft) USB A to USB C 3.0 cable: 2.2m (7.2 ft)	Appliance Mode Supports compatible video conferencing software in appliance mode (no PC required), including Microsoft Teams Rooms, Zoom Rooms, RingCentral Meetings Rooms, and Tencent (for Chinese version only). Contact Logitech or see https://prosupport.logi.com/hc/en-us/articles/1500001344641 for availability information and additional video conferencing platforms. Certifications All components included in the room solution bundle are certified for Zoom Rooms, Microsoft Teams on Android, and RingCentral Meetings Rooms (and Tencent for the China-only version). Contact the manufacturer for additional information on pending and granted certifications.	Standard: 2-year limited hardware warranty included Extended: 1-year and 3-year extended warranties available at the time of hardware purchase. Contact your reseller for availability.	
RALLY BAR MINI - ENVIRONMENTAL			PART NUMBERS
Operating Temperature: 0 to 40 °C Storage Temperature: -40 to 70 °C Humidity: 10 to 95% BTU/hr: 57 idle, 64 in meeting			US/CA/MX: 991-000385 Brazil: 991-000386 Argentina/Chile: 991-000387 EU/SEA/INDO: 991-000388 UK/HK: 991-000389 Switzerland: 991-000390 AUS/NZ: 991-000391 Taiwan: 991-000392 India: 991-000393 Korea: 991-000396 China: 991-000394 Japan: 991-000395



Contact your reseller
or contact us at
www.logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2022 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2022