

BE YOUR WINDOW TO THE WORLD









SELLING POINTS

- Windows 11 Home MSI recommends Windows 11 Pro for business
- 0.826-Liter with VESA mountable design
- Up to Intel[®] Core[™] 7 processor 150U with dual channel DDR5 SO-DIMMs memory
- Two Thunderbolt[™] 4, and one of them supports PD-in (up to 100W)
- Dual 2.5G LAN & dTPM support
- Quadruple display support & easy to upgrade design
- MSI AI Engine: optimize user experience without manual configuration.
- MSI Power Link technology allows Cubi NUC to be powered by an MSI-selected monitor.
- Power Meter enables one-click power saving, carbon emission calculation, and electricity cost estimation
- Made with PCR-recycled plastics; FSC[™]certified carton; Waste reduction with recycled molded pulp (100% recyclable); Manufact ...

FEATURES



The same performance as a big rig but in a powerful small-sized chassis so you can take it anywhere.



4-Display Support

Enhance the workflow efficiency by previewing e-commerce content on up to four monitors for improved productivity.



Power Meter

Power Meter enables one-click power saving, carbon emission calculation & electricity cost estimation.



MSI Cloud Center

MSI Cloud Center app brings you a private cloud and helps backup files of your mobile devices (Android & iOS)



dTPM 2.0 Support

dTPM 2.0 design secures your confidential data with encryption



DDR5 Elevate system performance with dual-channel DDR5 technology to enhance efficiency and stability for users.



Up to 40Gb transmission speed and 2X PCI-e bandwidth than previous generation, brings fast speed and versatility, offering a

fast and simple level of connection for work.

Thunderbolt™ 4



Dual 2.5G network solution for Intranet and Internet offers a smooth experience for effective network connection.



VESA Mountable


To be mounted on the wall of your office & home with a VESA standard design which can make it completely invisible on a desk.





BE YOUR WINDOW TO THE WORLD

CONNECTIONS

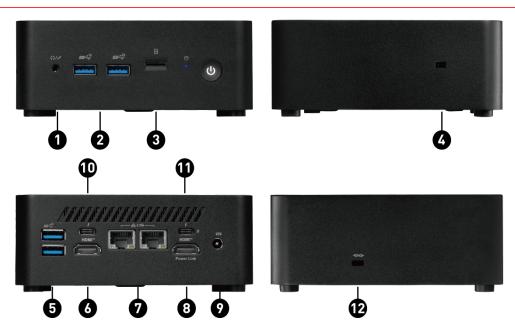


- 1. 1x Mic-in / Headphone-out Combo
- 3. 1x Micro-SD card Reader
- 5. 2x USB 10Gbps Type A
- 7. 2x RJ45 LAN (2.5G)
- 9. 1x DC Jack
- 11. 1x Thunderbolt 4 (DP 1.4 alt-mode up to 4K@60Hz / PD-out 15W / PD-in 10. 1x Thunderbolt 4 (DP 1.4 alt-mode up to 4K@60Hz / PD-out 15W) up to 100W)
- 2. 2x USB 10Gbps Type A
- 4. 1x External Power Switch Slot
- 6. 1x HDMI out (supports 4K @60Hz as specified in HDMI 2.1)
- 8. 1x HDMI out (supports 4K @60Hz as specified in HDMI 2.1) which supports the MSI Power Link

 - 12. 1x Kensington Lock Slot

SPECIFICATIONS

MB Ori. MKT Name	Proprietary (MS-B0B11)	
Full loading mode	38 db	
Idle mode	28 db	
Regulatory Compliance	FCC(Class B) CB/CE UL(CUL) BSMI VCCI RCM(C-Tick) Epeat Sliver	
Operating, Storage Humidity	0% ~ 85%;0% ~ 90%	
Operating, Storage Temperature	0° C ~ 35° C ; -20° C ~ 60° C	
W/O KB Weight (Net kg)	0.63	
Liter	0.826	
Product Dimension (WxDxH) (mm)	135.6 x 132.5 x 50.10	
VESA size	100 x 100 mm	
Power Supply	120W	
Flash BIOS Button	NA	
WiFi Antenna	NA	
Thunderbolt (R)	2x (Thunderbolt 4)	
mini DP in	NA	







BE YOUR WINDOW TO THE WORLD

Lock type	Kensington Lock
S/PDIF	NA NA
DVI-D out	NA
COM Port	_ <u>NA</u>
PS/2	<u>NA</u>
mini DP out	_ <u>NA</u>
DP out	NA
HDMI out	2x (v2.1)
VR-Link	NA
VGA out	<u>NA</u>
USB 2.0 Type A (R)	NA
USB 2.0 Type C (R)	_ <u>NA</u>
USB 3.2 Gen 2x2 Type A (R)	_ <u>NA</u>
RJ45	
Card Reader	
Audio Jack	NA
Mic-in/Headphone-out combo	
Headphone-out (HiFi / SPDIF)	_ <u>NA</u>
Headphone-out	_ <u>NA</u>
Mic-in	NA
USB 2.0 Type C	NA
USB 2.0 Type A	NA NA
USB 3.2 Gen 2x2 Type A	_ <u>NA</u>
PCle 3.0 x1	_ <u>NA</u>
PCle 4.0 x16	<u>NA</u>
PCle 5.0 x16	_ <u>NA</u>
PCIe 2.0 x1	<u>NA</u>
PCIe 3.0 x16	NA
Wireless LAN	Intel Wireless AX211 + Bluetooth v5.3 Intel Wi-Fi 7 BE200 + Bluetooth 5.4
LAN	2x Intel I226-V
Audio Type	2.1 Channel HD Audio
Audio Chipset	Realtek ALC256
Speaker	NA
Optical Drive	NA
M.2 SSD combo (Gen 3 x4 for Core / Gen 2 x4 for Pentium& Celeron)	0
M.2 SSD combo (NVMe PCIe Gen4 x4 / SATA)	0
M.2 SSD (NVMe PCle Gen4 x4)	2
3.5" Drive Bays	NA
3.5 Drive buys	NA
2.5" Drive Bays	1
·	
2.5" Drive Bays	1
2.5" Drive Bays SATA connectors	1
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA)	1 1 0
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA)	1 1 0 0
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4)	1 1 0 0 0
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCIe Gen3 x2 / SATA) M.2 SSD combo (NVMe PCIe Gen3 x4 / SATA) M.2 SSD (NVMe PCIe Gen3 x4) M.2 SSD (SATA)	1 1 0 0 0
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 SIOts	1 1 0 0 0 0 0
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 SIOTS mSATA slots	1 1 0 0 0 0 0 0 2 NA
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCIe Gen3 x2 / SATA) M.2 SSD combo (NVMe PCIe Gen3 x4 / SATA) M.2 SSD (NVMe PCIe Gen3 x4) M.2 SSD (SATA) M.2 SSD (SATA) M.2 SIOTS mSATA slots M.2 SSD (NVMe PCIe Gen3 x2)	1 1 0 0 0 0 0 2 NA 0
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCIe Gen3 x2 / SATA) M.2 SSD combo (NVMe PCIe Gen3 x4 / SATA) M.2 SSD (NVMe PCIe Gen3 x4) M.2 SSD (SATA) M.2 SSD (SATA) M.2 Slots mSATA slots M.2 SSD (NVMe PCIe Gen3 x2) W/O KB Weight (Gross kg)	1 1 0 0 0 0 0 2 NA 0 1.45
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 SIOTS mSATA slots M.2 SSD (NVMe PCle Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net lbs)	1 1 0 0 0 0 0 2 NA 0 1.45 1.38
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 SIOTS MSATA SIOTS M.2 SSD (NVMe PCle Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net Ibs) W/KB Weight (Net kg)	1 1 0 0 0 0 0 2 NA 0 1.45 1.38
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 slots mSATA slots M.2 SSD (NVMe PCle Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net lbs) W/KB Weight (Net kg) W/O KB Weight (Gross lbs)	1 1 0 0 0 0 0 2 NA 0 1.45 1.38 N/A
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCIe Gen3 x2 / SATA) M.2 SSD combo (NVMe PCIe Gen3 x4 / SATA) M.2 SSD (NVMe PCIe Gen3 x4) M.2 SSD (SATA) M.2 SSD (SATA) M.2 slots mSATA slots M.2 SSD (NVMe PCIe Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net lbs) W/KB Weight (Net kg) W/O KB Weight (Gross lbs) W/KB Weight (Net lbs)	1 1 0 0 0 0 0 2 NA 0 1.45 1.38 N/A 3.2 N/A
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 Slots mSATA slots M.2 SSD (NVMe PCle Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net lbs) W/KB Weight (Net kg) W/O KB Weight (Net lbs) W/KB Weight (Net lbs) W/KB Weight (Gross kg)	1 1 0 0 0 0 2 NA 0 1.45 1.38 N/A 3.2 N/A
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 Slots mSATA slots M.2 SSD (NVMe PCle Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net lbs) W/KB Weight (Net kg) W/O KB Weight (Net lbs) W/KB Weight (Net lbs) W/KB Weight (Gross kg) W/KB Weight (Gross kg)	1 1 0 0 0 0 0 2 NA 0 1.45 1.38 N/A 3.2 N/A N/A
2.5" Drive Bays SATA connectors M.2 SSD combo (NVMe PCle Gen3 x2 / SATA) M.2 SSD combo (NVMe PCle Gen3 x4 / SATA) M.2 SSD (NVMe PCle Gen3 x4) M.2 SSD (SATA) M.2 Slots mSATA slots M.2 SSD (NVMe PCle Gen3 x2) W/O KB Weight (Gross kg) W/O KB Weight (Net lbs) W/KB Weight (Net kg) W/O KB Weight (Net lbs) W/KB Weight (Gross kg) W/KB Weight (Gross kg) W/KB Weight (Gross lbs) W/KB Weight (Gross kg) W/KB Weight (Gross kg)	1 1 0 0 0 0 0 0 1.45 1.38 N/A 3.2 N/A N/A N/A N/A 2







BE YOUR WINDOW TO THE WORLD

Max Capacity	Max 64GB
Graphics	Intel® Graphics
CPU Back FAN Dimension (WxDxH) mm	NA
Bottom System FAN q'ty (Total/Free)	NA
Bottom System FAN Dimension (WxDxH) mm	NA
Rear System FAN q'ty (Total/Free)	NA
Rear System FAN Dimension (WxDxH) mm	NA
Top System FAN q'ty (Total/Free)	NA
Top System FAN Dimension (WxDxH) mm	NA
Front System FAN q'ty (Total/Free)	NA
Front System FAN Dimension (WxDxH) mm	NA
CPU FAN Dimension (WxDxH) mm	80*80*8.5mm
TDP	15W
Туре	Air
Chipset	Intel® SoC
USB 3.2 Gen 2 (10G) Type A	2
USB 3.2 Gen 2 (10G) Type C	NA
USB 3.2 Gen 2x2 (20G) Type C	NA
os	Windows 11 Home Windows 11 Pro
СРИ	Intel® Core™ 7 processor 150U (12M Cache, 1.80 GHz up to 5.40 GHz) Intel® Core™ 5 processor 120U (12M Cache, 1.40 GHz up to 5.00 GHz) Intel® Core™ 3 processor 100U (10M Cache, 1.20 GHz up to 4.70 GHz)