

PATH TO THE FUTURE


Visualisiere deinen Sieg mit dem MSI MAG 345CQR Gaming™ Monitor. Ausgestattet mit 180Hz Bildwiederholrate und 1ms Reaktionszeit, gibt dir der MAG 345CQR genau den kompetitiven Vorteil den du brauchst, um deine Gegner zu besiegen. Die hohe UWQHD-Auflösung (3440x1440) lässt dich faszinierende Bilder erleben. Durch die Adaptive-Sync-Technologie wird die Bildwiederholrate des Monitors mit der GPU synchronisiert für eine fesselnde Gaming-Erfahrung ohne Tearing. Sei dir sicher, dass du dein Ziel triffst.



Picture and logos

SELLING POINTS

- VA Panel – Reaktionszeit von 1 ms (MPRT) und optimiert die Bildschirmfarben und die Helligkeit.
- UWQHD Auflösung - Deine Games sehen noch detailreicher und besser aus.
- 180Hz Bildwiederholrate- Erlebe flüssiges Gaming mit einer rasanten Bildwiederholrate und Reaktionszeit.
- 1ms (MPRT) schnelle Reaktionszeit- Beseitigt Screen Tearing und ruckelige Bildraten mit 1ms GTG Reaktionszeit.
- Night Vision – Intelligenter Schwarztuner, der feine Details in dunklen Bereichen hervorhebt und so für ein optimales Bild sorgt.
- Adaptive-Sync Technologie - Ruckelfreies, tearing-freies und flüssiges Gaming.
- Less Blue Light – Eine Softwarelösung zur Reduzierung der Lichtemission im blau-violetten Bereich des Blaulichtspektrums.

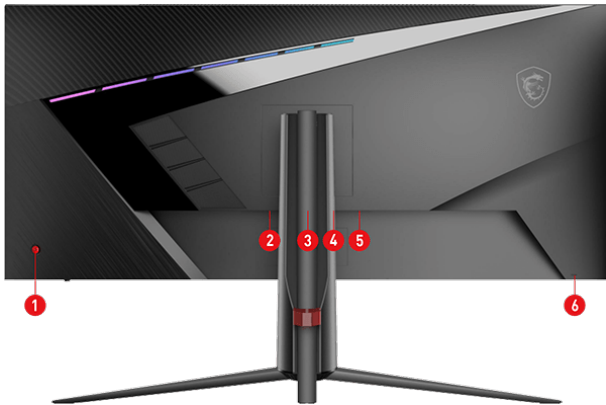

1. 5-Wege-Joystick-Navigation
2. 2 x HDMI™ (2.0b)
3. DisplayPort (1.4a)
4. Kopfhörerausgang
5. Stromanschluss
6. Kensington Lock



MONITOR

MAG 345CQRDE

MAG 345CQRDE

SPECIFICATION

Model	Part No	9S6-3DD14H-003
	MKT Name	MAG 345CQRDE
	MKT Spec	MAG 345CQRDE
	Color	ID1/Black-Black
	SKU Number	9S6-3DD14H-003
	Entity MKT Name	MAG 345CQRDE
	Model	3DD1
Schnittstellen (Rückseite)	Card Reader	N/A
Power	Power Type	External Adaptor 19V 3.42A
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	31
	Annual Energy Consumption (KWh)	31
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
	Power Cord Type	C13
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 100 mm
	VESA Mounting	100x100mm
	Frameless Design	Yes
Abmessungen & Gewicht	Inside Carton Dimension (WxDxH) (inch)	N/A
	Weight (Net kg)	7.75
	Weight (Gross kg)	11.3
Produktmaße mit Standfuß	Product Dimension with Stand (WxDxH) (mm)	797.53 x 332.31 x 518.9
	Product Dimension with Stand (WxDxH) (inch)	31.4 x 13.08 x 20.43
Gewicht	Weight Without Stand (kg)	5.5
Verpackung	Outer Carton Dimension (WxDxH) (inch)	N/A
Garantie	Warranty	36M
Zubehör	3.5mm Mic Cable	0
	Switch Case	0
	Portable Screen Protection Case	0
	Monitor Hood	0
	Speaker (Accessories)	0
	DisplayPort Cable	1
	HDMI Cable	0
	DVI Cable	0
	USB Type A to Type B Cable	0
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	Mouse Bungee Unit	0
	VESA Screw	4
	Power Cord	1
	AC Adaptor	1
	Warranty Card	1
	Quick Guide	1
Barcode Info	EAN	4711377140805



MONITOR

MAG 345CQRDE

MAG 345CQRDE

Display	Screen Size	34" (86.36 cm)
	Active Display Area (mm)	797.22(H) x 333.72(V)
	Curvature	Curve 1000R
	Panel Type	VA
	Resolution	3440x1440 (UWQHD)
	Pixel pitch (mm)	0.23175(H)x0.23175(V)
	Aspect Ratio	21:9
	Dynamic Refresh Rate technology	FreeSync Premium
	Dynamic Refresh Rate Activated Range	48 ~ 180Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	300
	Contrast Ratio	3000:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	68.47~268.2 KHz(H) / 48~180 Hz(V)
	Refresh Rate	180Hz
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	105%/85%
	NTSC (CIE1931 area percentage/overlap)	88%/80%
	sRGB (CIE1976 area percentage/overlap)	120%/99%
	sRGB (CIE1931 area percentage/overlap)	125%/99%
	Adobe RGB (CIE1976 area percentage/overlap)	103%/90%
	Adobe RGB (CIE1931 area percentage/overlap)	92%/84%
	DCI-P3 (CIE1976 area percentage/overlap)	95%/95%
	DCI-P3 (CIE1931 area percentage/overlap)	90%/90%
	Rec.709 (CIE1976 area percentage/overlap)	120%/99%
	Rec.709 (CIE1931 area percentage/overlap)	125%/99%
	Rec.2020 (CIE1976 area percentage/overlap)	70%/70%
	Rec.2020 (CIE1931 area percentage/overlap)	65%/65%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
Schnittstellen	Headphone-out	1
	Card reader	N/A
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	797.53 x 332.31 x 518.9
	Product Dimension without Stand (WxDxH) (mm)	797.53 x 158.18 x 363.02
	Stand Dimension (WxDxH) (mm)	672.63 x 331.88 x 402.75
	Weight (Net kg)	7.75
	Weight Without Stand (kg)	5.5
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	N/A
	Outer Carton Dimension (WxDxH) (cm)	N/A
	Weight (Gross kg)	11.3