


OVERVIEW

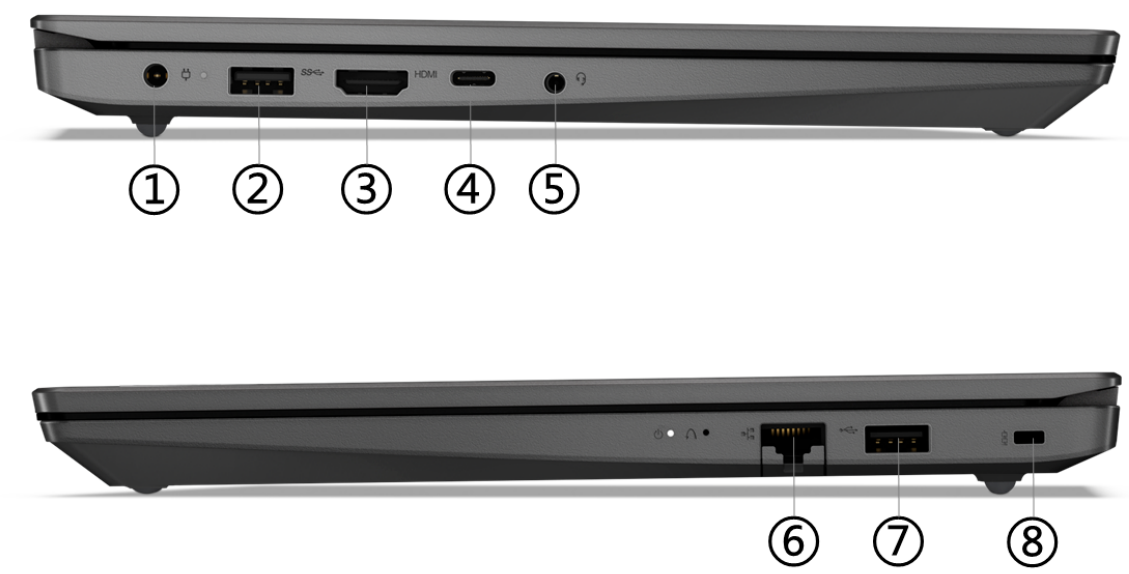

1. Power connector	5. Headphone / microphone combo jack (3.5mm)
2. USB 3.2 Gen 1	6. Ethernet (RJ-45)
3. HDMI	7. USB 2.0
4. USB-C 3.2 Gen 1	8. Kensington Nano Security Slot

PERFORMANCE

Processor

Processor Family

13th Generation Intel® U or H Series Core™ i3 / i5 / i7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core™ i3-1315U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.5GHz / E-core 3.3GHz	10MB	Intel® UHD Graphics
Core™ i5-1335U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® Iris® Xe Graphics ^[1]
Core™ i5-13420H	8 (4 P-core + 4 E-core)	12	P-core 2.1GHz / E-core 1.5GHz	P-core 4.6GHz / E-core 3.4GHz	12MB	Intel® UHD Graphics
Core™ i7-1355U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 5.0GHz / E-core 3.7GHz	12MB	Intel® Iris® Xe Graphics ^[2]

Notes:

[1], [2] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- No operating system

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
Intel® UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.1
Intel® Iris® Xe Graphics ^[1]	Integrated	Shared	Share CPU TDP	DirectX® 12.1

Notes:

[1] Intel® Iris® Xe Graphics capability requires system to be configured with dual-channel memory. On the system with single-channel memory, Intel® Iris® Xe Graphics will function as Intel® UHD Graphics.

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI® supports up to 3840x2160@30Hz
- USB-C® supports up to 4096x2160@60Hz

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory^[1]

- Up to 16GB (16GB soldered + empty SO-DIMM slot) DDR4-2933 offering
- Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type**

- DDR4-2933
- DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

Storage

Storage Support†1

- Models with 38Wh battery: up to two drives, 1x 2.5" HDD + 1x M.2 SSD
 - 2.5" HDD up to 1TB
 - M.2 2242 SSD up to 1TB
- Models with 45Wh battery: one drive, 1x M.2 SSD
 - M.2 2242 SSD up to 1TB

Storage Slot

- Models with 38Wh battery: one 2.5" drive slot + one M.2 slot
 - One 2.5" SATA HDD slot
 - One M.2 2280 PCIe® 4.0 x4 slot
- Models with 45Wh battery: one M.2 slot
 - One M.2 2280 PCIe® 4.0 x4 slot

Storage Type***

Disk Type	Interface	RPM	Offering
2.5" SATA HDD	SATA 6Gb/s	5.4K	1TB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	128GB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	256GB / 512GB / 1TB

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 1.5W x2, Dolby® Audio™

Microphone

Dual-microphone array

Camera

HD 720p, with privacy shutter, fixed focus

Battery

Battery**

- Integrated Li-Polymer 38Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life†1

- Models with 38Wh battery:
 - MobileMark® 2018: 6.4 hr
 - Local video (1080p) playback@150nits: 7.5 hr
- Models with 45Wh battery:
 - MobileMark® 2018: 6.8 hr
 - Local video (1080p) playback@150nits: 8.4 hr

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

- Power Adapter**[1]
- 65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz
 - 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
15.6"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	60Hz	45°/45°/15°/35°	TÜV Low Blue Light (Software)
15.6"	FHD (1920x1080)	None	IPS[1]	300nits	Anti-glare	16:9	800:1	45% NTSC	60Hz	85°/85°/85°/85°	TÜV Low Blue Light (Software)

Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

- Keyboard
- 6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key, numeric keypad
- Keyboard Backlight

Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 62 x 104 mm (2.44 x 4.09 inches)

Mechanical

- Dimensions (WxDxH)[1]
- 359.2 x 235.8 x 19.9 mm (14.14 x 9.28 x 0.78 inches)
- Weight[2]

Starting at 1.65 kg (3.64 lbs)

Case Color**

- Business black
- Iron grey

Surface Treatment**

- IMR (in-mold decoration by roller)
- Texture

Case Material

PC-ABS (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

Gigabit Ethernet, 1x RJ-45

WLAN + Bluetooth®**

- 802.11ac 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.2, M.2 card^[1]

Notes:

[1] Wi-Fi® 6 full features might be limited by country-level restrictions.

Ports^[1]

Standard Ports

- 1x USB 2.0
- 1x USB 3.2 Gen 1
- 1x USB-C® 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.2)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)
- 1x Power connector

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

Docking

Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for Lenovo® V15 G4 IRU](#)

SECURITY & PRIVACY

Security

Security Chip

Firmware TPM 2.0 integrated in SoC

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Fingerprint Reader

No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- Hard disk password
- Self-healing BIOS

Other Security

Camera privacy shutter

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 2-year (1-yr battery) courier or carry-in service
- No base warranty

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- At altitudes up to 2438 m (8,000 ft)
 - Operating: 5°C to 35°C (41°F to 95°F)
 - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
 - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

^[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories^[1]

- Lenovo® 15.6" laptop casual toploader, polyester
- None

Notes:

^[1] For more compatible accessory solutions, please visit [Accessories for Lenovo® V15 G4 IRU](#).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^{[2][3]}

- ENERGY STAR® 8.0
- EPEAT™ Silver Registered^[4]
- ErP Lot 6
- ErP Lot 26
- FSC certified package
- RoHS compliant

Notes:

- [1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
- [2] EPEAT™ registration and ENERGY STAR® certification are dependent on system OS. Please visit epeat.net and energystar.gov for more information.
- [3] EPEAT™ is only available for MT 83CC.
- [4] EPEAT™ is registered where applicable, please see epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

TÜV Rheinland® Low Blue Light (Software Solution)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel