

20-Port Gigabit Rackmount Switch with 16-Port PoE+

Model: MS120GP


// Highlights

- 16× Gigabit PoE+ RJ45 ports, 2× Gigabit non-PoE RJ45 ports, and 2× Gigabit SFP slots.
- High PoE power budget with up to 30 W for each PoE port and 192 W* for all PoE ports.
- Working with IEEE 802.3af/at compliant PDs.
- Up to 250m data and power transmitting range under Extend Mode.**
- High-priority transmission for ports 1–4 to guarantees the quality of sensitive applications like video monitor.
- Isolation Mode allows fast client traffic separation for higher security and performance.
- PoE Auto Recovery guarantees stable operation of PoE devices by automatically rebooting the dropped or unresponsive PD devices.
- Plug and Play. No configuration or central management required.



// Connections

The MS120GP is a 20-port gigabit rackmount switch with 16-port PoE+, ideal for small and medium business IP surveillance with a 192 W PoE budget. The plug-and-play design makes it easy for deployment without the need for a technician.

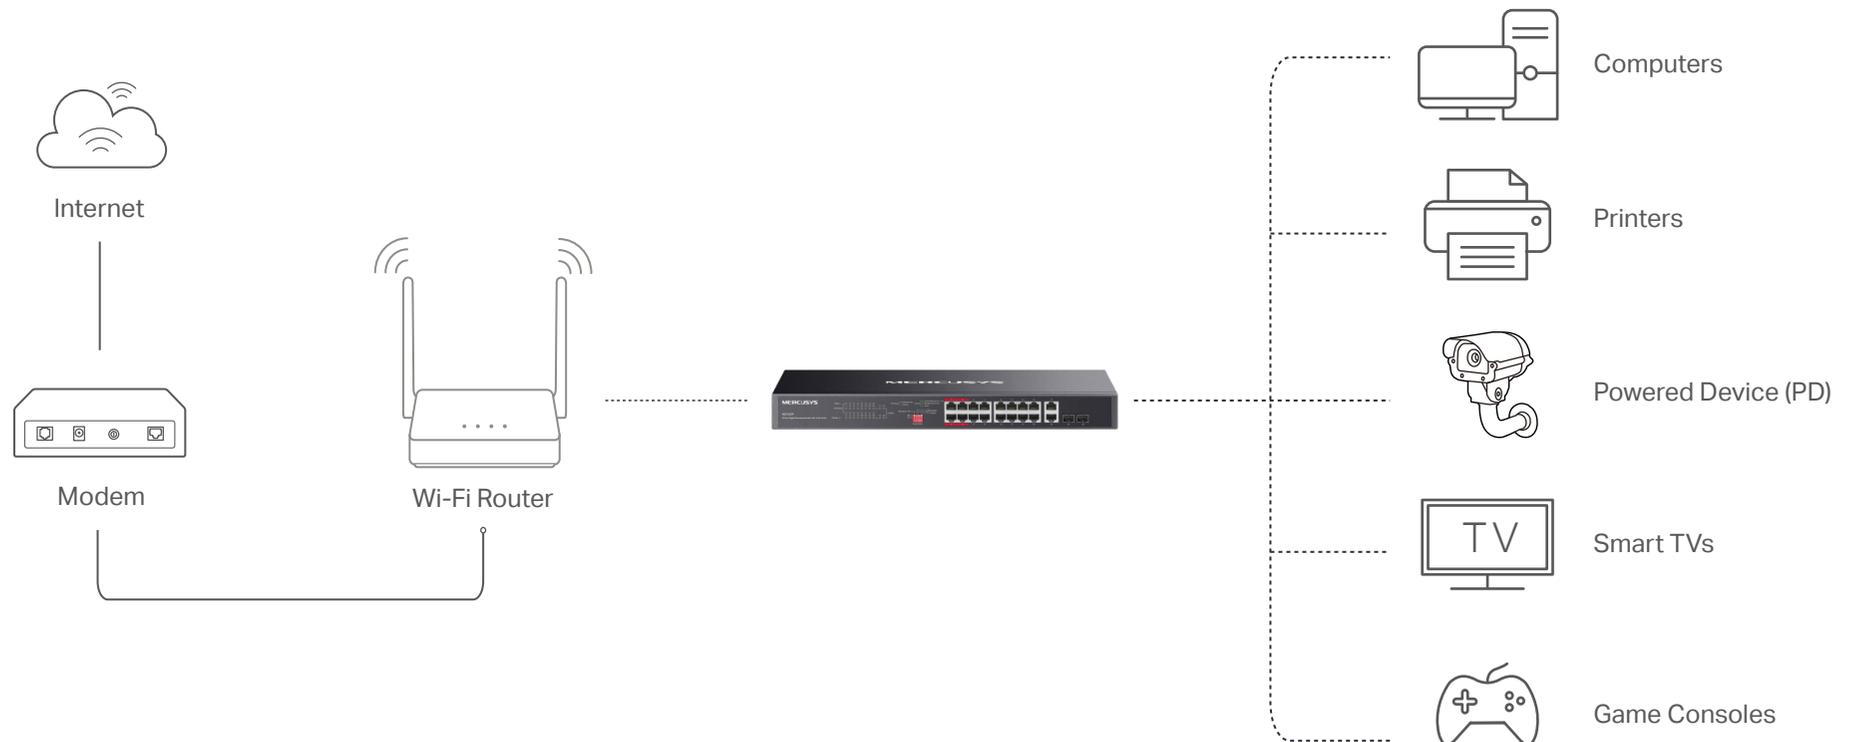

// Specifications

Product Picture	
Model	MS120GP
Standards	IEEE 802.3i, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.3z, IEEE 802.3af, IEEE 802.3at
Interface	16x 10/100/1000 Mbps PoE+ RJ45 Ports 2x 10/100/1000 Mbps RJ45 Ports 2x Gigabit SFP Slots
Transmission Medium	10BASE-T: 2-pair UTP/STP of Cat. 3 or above (≤100 m) 100BASE-TX: 2-pair UTP/STP of Cat. 5 or above (≤100 m) 1000BASE-T: 4-pair UTP/STP of Cat. 5e or above (≤100 m) 1000BASE-X: MMF, SMF
PoE	PoE Standard: compatible with 802.3af/at PDs PoE Port 1-16, up to 30 W per port PoE Power Budget: 192 W*
Auto-Negotiation	YES
Auto MDI/MDIX	YES
PoE Power on RJ45	Power+: pin 3 & pin 6 Power -: pin 1 & pin 2
Max Power Consumption	13.48 W (220V/50 Hz @ 25 °C, no PD connected) 219.05 W (220V/50 Hz @ 25 °C, with 192 W PD connected)
Max Heat Dissipation	45.96 BTU/h (220V/50 Hz @ 25 °C, no PD connected) 746.96 BTU/h (220V/50 Hz @ 25 °C, with 192 W PD connected)
Forwarding Mode	Store and Forward
Switch Capacity	40 Gbps
MAC Address Table	8K, Auto-learning, Auto-aging
Auto Recovery	YES
Extend Mode	YES
Isolation Mode	YES
Flow Control	YES
Fan Quantity	2
Noise	47.2 dBA max @ 50cm 25 °C 39.9 dBA max @ 100cm 25 °C
LED	Power, Link/Act, PoE Status, PoE Max
Dimensions	440*180*44 mm (17.3*7.1*1.7 in)
Certification	CE, RoHS
Environment	Operating Temperature: -10 °C to 50 °C (14 °F to 122 °F) Storage Temperature: -40 °C to 70 °C (-40 °F to 158 °F) Operating Humidity: 10% to 90% RH, non-condensing Storage Humidity: 5% to 90% RH, non-condensing

// Package Contents

- 20-Port Gigabit Rackmount Switch with 16-Port PoE+ (MS120GP)
- Power Cord
- Installation Guide
- Mounting Brackets and Fittings

*PoE budget calculations are based on laboratory testing. Actual PoE power budget is not guaranteed and will vary as a result of client limitations and environmental factors.
**The speed of the ports which are under extend mode will be downgraded to 10 Mbps. Actual transmission distance may vary from the quality of the cables.

For more information, please visit www.mercusys.com

MERCUSYS TECHNOLOGIES CO., LTD.
3rd Floor, Building R1-B, No. 23, Gaoxin 4th Road,
South Hi-Tech Park, Nanshan, Shenzhen, P.R.China

Specifications are subject to change without notice. MERCUSYS is a registered trademark of MERCUSYS TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2025 MERCUSYS TECHNOLOGIES CO., LTD. All rights reserved.