





### Features & Benefits

- Depth 18" of chassis for space-sensitive applications
- Optimized fan placement for better cooling performance
- Cushion on drive cages to depress HDD & ODD vibration
- Removable drive cages for easy installation
- Supports PS/2 PSU and other standard components to lower TCO

### Specification

<b>M/B Form Factor</b>	• Micro ATX (9.6" x 9.6")
<b>Dimension (D x W x H)</b>	• 457.2 x 430 x 88 (mm) , 18" x 16.9" x 3.5"
<b>Drive Bay</b>	• Exposed: 2 x 5.25" + 1 x 3.5" + 1 x slim ODD • Internal: 2 x 2.5"
<b>PSU Form Factor</b>	• PS/2 Single ( rear )
<b>Indicators</b>	• 1 x Power Status, 1 x HDD Activity, 2 x LAN Activity
<b>Front Control</b>	• Power On/Off, System Reset, 2 x USB2.0/ USB3.0 (Option)
<b>Cooling Fans</b>	• Front: 1 x 80mm (T=32mm), Rear: 2 x 40mm (T=28mm) (Option)
<b>System Security</b>	• Intrusion switch ( Option )
<b>Slot Opening</b>	• 4 x low profile
<b>Metal Thickness</b>	• 1.0mm
<b>Materials</b>	• SGCC
<b>HDD Backplane</b>	• N/A
<b>Net Weight</b>	• 6.9 kg
<b>Gross Weight</b>	• 9.3 kg
<b>Cubic Feet</b>	• 2.5
<b>Container Info.*</b>	• 20': 388, 40': 788, 40'H: 940

\*Single Packing

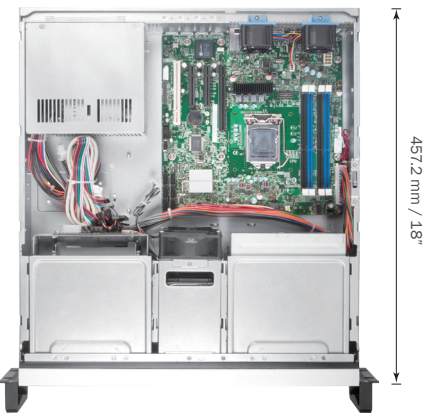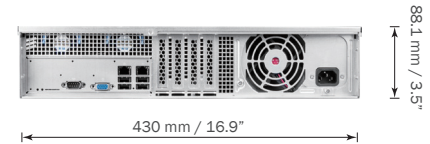

2-Door Front Bezel



Aluminum Bezel Frame

### Optional Items

	Order Code	Description
<b>Cable</b>	26H11324102A0	PSU extension cable, 24P to 24P ,250mm
	26H11324103A0	PSU extension cable, 8P to 4P+4P,400mm
	84H324110-010	Intrusion switch, 2-pin, 500mm
<b>Drive Cage</b>	84H324110-008	1 x 5.25" & 1 x 3.5" drive bays
	84H324110-007	1 x 5.25" & 1 x slim ODD bays
<b>Slide Rail</b>	84H341300-002	22", for 2U/3U/4U

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Detailed in CHENBRO websites)



1 x 5.25" + 1 x 3.5"  
Removable drive bay



1 x 5.25" + 1 x slim ODD  
Removable drive bay



Anti-vibration drive cage



2.5" cage with  
80mm fan

### Order Information

Order Code	M/B	Bezel	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM24200-L	9.6" x 9.6"	Al. Frame	1 x 8032	4 x LP	Option	Option
RM24200-L2	9.6" x 9.6"	2-door	1 x 8032	4 x LP	Option	Option