



4K Wireless Video Extender, 30 m (HDMI - HDMI)



Quick Installation Guide
DS-55323

Table of Contents

1. Introduction.....	3
2. Main Features	3
3. Package Contents	3
4. Product Features	4
5. Product Specification.....	5
6. Overview	9
6.1 Transmitter Unit.....	9
6.2 Receiver Unit	10
7. Installation.....	10
8. Pairing Transmitter and Receiver	11
9. Wireless HDMI Transmission.....	12
10. Remark	12
11. Safety Instructions.....	13

1. Introduction

Experience wireless audio and video transmission in sharp UHD 4K/30Hz with the 4K Wireless HDMI Extender. The set is designed for easy setup without a driver or software thanks to Plug & Play. With a range of up to 30 meters with an unobstructed view, it guarantees reliable transmission. AES 128 encryption and the WPA2 protocol ensure secure data transmission. Compatible with HDMI 2.0/1.4 and HDCP 2.2/1.4. This is ideal for home theaters, conference rooms and training facilities. Discover the freedom of wireless entertainment.

2. Main Features

- Wireless HDMI signal transmission up to 30 m (with unobstructed view)
- Point-to-point connection - 1x transmitter (source) + 1x receiver (output device)
- Supports resolutions up to Full HD (2160p / 30 Hz)
- Easy operation and handling thanks to Plug & Play - Just plug in and get started, no driver or software required
- Power supply via USB-C connection
- AES 128 bit encryption
- WPA2 protocol
- HDMI 2.0/ 1.4
- HDCP 2.2/ 1.4

3. Package Contents

- 1x Transmitter unit
- 1x Receiver unit
- 2x USB-A to USB-C cable (100 m)

- 2 x HDMI extension cable (15 cm)
- 1x QiG

4. Product Features

Features	Description
Plug and play	Connect the transmitter and receiver to the HDMI ports of the source and output device, wait for the connection, share simply by pressing a button
App/Software Free	DS-55323 doesn't need any software or app installation, no setup, no IT team
Compatibility	Supports signal sources (e.g. gaming consoles, Blu-Ray players, etc.) with HDMI output as well as PCs/notebooks with Windows, macOS
Auto Channel Selection	The DS-55323 will select the best Wi-Fi channel automatically after power on to ensure streaming smoothly

Fast Speed with 5G AC MIMO Technology	The DS-55323 comes with the fast 802.11ac technology which increases Wi-Fi speeds by allowing a pair of wireless devices to simultaneously send or receive multiple data streams
---------------------------------------	--

Security / Protection	DS-55323 supports AES 128-bit security encryption and WPA2/WPA-PSK/WPA2-PSK authentication protocol to protect data. HDCP is supported to protect the content
-----------------------	---

5. Product Specification

Transmitter Specifications	
HDMI input	HDMI 1.4
HDCP Version	HDCP 1.4
Input Resolution	2160p/30fps, 1080p/60fps, 1080p/30fps, 1080p/24fps 1080i/50fps, 1080i/60fps; 720p/30fps, 720p60fps; 480p/60fps
Transmission Resolution	Maximum 2160p/30fps
Audio Format	PCM
Audio Channel	2 channels
Latency	About 100ms latency
Security	AES 128-bit encryption mechanism
Wireless Standard	Built in high performance 802.11ac Wi-Fi module

Frequency	5150-5350MHz ; 5470-5725MHz; 5725-5850MHz ; 5850-5925MHz The specific frequency bands utilized are upon the legal regulations by each country
Bandwidth	Support 20MHz, 40MHz, 80Mhz
WiFi Power	13 dBm
Auto Pairing & Auto Connection	Automatically establish connection with the most favorable Wi-Fi channel accessible to guaranteeing exceptional wireless performance
Distance	Up to 30 meters in the clear line of sight
LED	1x
Connections	1x HDMI input 1x USB-C (power supply) 1x Connection button 1x Reset button
Power Supply	5V/1A
Power Consumption	About 3W
Dimension:	81 x 34x 13 mm
Weight:	39 g
Temperature Range	
Operating	0°C to +40°C (+32°F to +104°F)
Storage	-10°C to +60°C (+14°F to +140°F)

Humidity	
Operating	10% to 80% relative humidity
Storage	5% to 90% relative humidity


Receiver Specification	
HDMI Output Version	HDMI 2.0
HDCP Version	HDCP 2.2
HDMI Output Resolution	Up to 2160p/60fps
Transmission Resolution	Maximum 2160p/30fps
Audio Format	PCM
Audio Channel	2 channels
Latency	As low as 100ms latency (at 60fps)
Security	AES 128-bit encryption mechanism
Wireless Standard	Built in high performance 802.11ac Wi-Fi module
Frequency	5150-5350MHz ; 5470-5725MHz; 5725-5850MHz ; 5850-5925MHz The specific frequency bands utilized are upon the legal regulations by each country

Bandwidth	Support 20MHz, 40MHz, 80Mhz
WiFi Power	About 13 dBm
Auto Pairing & Auto Connection	Automatically establish connection with the most favorable Wi-Fi channel accessible to guaranteeing exceptional wireless performance
High Sensitive Antennas	High sensitive antennas provide stable wireless connections and optimal coverage
Distance	Up to 30 meters in the clear line of sight
Connections	1x HDMI output 1x USB-C (power supply) 1x Connection button/ Reset button
LED	1x
Power Supply	5V/0.6A
Power Consumption	About 4W
Dimension	81 x 34 x 13 mm
Weight	24 g
Temperature Range	
Operating	0°C to +40°C (+32°F to +104°F)
Storage	-10°C to +60°C (+14°F to +140°F)
Humidity	
Operating	10% to 80% relative humidity

Storage	5% to 90% relative humidity
---------	-----------------------------

6. Overview

6.1 Transmitter Unit

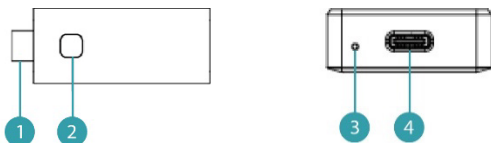


1. HDMI in	Connect with the HDMI port of the source devices
2. Connection button	Short press: start screen sharing Long press: long press up to 10 seconds for system reset
2. LED	To display different statue
3. Reset button	Press up to 3 seconds for system reset
4. USB-C	Power supply

LED indicator of the Transmitter Unit	Description
Static red	Transmitter unit system is booting on
Flashing red	Transmitter unit is searching for Receiver unit
Flashing blue	Waiting for connection
Static blue	Connected

Purple

No HDMI input signal

6.2 Receiver Unit

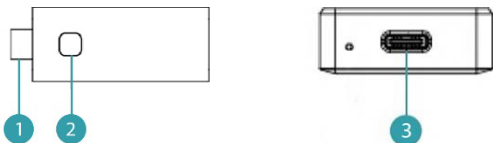

1. HDMI output	Connect with the HDMI port of the source devices
2. Connection button	Short press: start screen sharing Long press: long press up to 10 seconds for system reset
2. LED	Indicator connections status
3. USB-C	Power supply

LED indicator of the Receiver Unit	Description
Flashing blue	Waiting for connection
Static blue	Connected

7. Installation

Installing the transmitter

1. Connect the transmitter unit to the HDMI port of the source device
2. Connect the supplied USB cable to the transmitter (USB-C port) and to a USB-A port on the signal device or to a USB charging adapter and power socket

Installing the receiver

1. Connect the receiver unit to the HDMI connection of the TV, monitor or projector
2. Connect the supplied USB cable to the receiver (USB-C port) and to a USB-A port on the output device or to a USB charging adapter and power socket

8. Pairing Transmitter and Receiver

A set of DS-55323 includes one receiver and one transmitter, which are paired before shipment. Normally you don't need to pair them again thanks to auto-pair feature.

However, if you need to re-pair, you need to follow the instruction below to pair the transmitter with the receiver:

1. Power on receiver via USB-C and connect with display via video port.
2. Power on Transmitter and wait around 5-10 seconds, the button light of Transmitter will turn flash red. Then hold the reset button (button number 3.) up to 3 seconds till the button flash fast for factory reset, then the Transmitter will restart and the LED light will turn from red to flashing blue after 30s automatically.
3. Click the Transmitter button to stream when the Transmitter LED is turning to flash blue.

9. Wireless HDMI Transmission

1. Connect the receiver to the video port of the output device (see Installation Receiver)
2. Connect the transmitter to the video port of the signal source device (see Installation Transmitter)



3. The LED Indicator will turn red when it is booting up.
4. The LED Indicator will become blue and flash when the device is ready to stream.
5. Click the button to start casting, the LED indicator will become constant blue.

10. Remark

1. For video source devices with at least 5V/0.5A power output via the HDMI port, the wireless transmitter can be powered directly via the HDMI port without additional power supply via the USB-C port.
2. However, we always recommend the additional power supply via the USB-C port with the supplied cable for optimal transmission and stable connection

3. The transmission distance with limited visibility cannot be determined across the board and depends on the conditions on site
4. Walls, glass, etc. shorten the signal coverage or cause signal loss

11. Safety Instructions

Please read the following safety instructions carefully before commissioning:

Observe all warnings and instructions concerning the device

1. Do not expose the device to rain, moisture, vapors or liquids
 2. Do not insert objects into the device
 3. Do not attempt to repair the unit yourself or open the housing. You risk electric shock!
 4. Provide sufficient ventilation to avoid damage due to overheating
 5. Make sure that the unit is switched off and in a safe environment before starting up the unit
 6. During thunderstorms, damage can occur to connected electrical equipment due to overvoltage caused by lightning strikes
 7. Do not operate the device during thunderstorms
 8. Disconnect the device from connected electrical devices during thunderstorms
 9. Use the device only inside buildings
 10. Return the device to your dealer in case of repair
 11. Dust, humidity, vapors and strong cleaning agents or solvents can cause damage to the unit
- Disconnect the device from the power supply and connected devices before cleaning.
13. Clean the device with a dust-free cloth
 14. Use only the supplied power supply for operation
 15. To completely disconnect the system from the power supply, you

must unplug the power supply from the power outlet. You can disconnect the device from the power supply via the power supply unit.

Frequency Range & Maximum Transmit Power

WiFi Standard: IEEE 802.11.b/g/n/ac 5.8G

Channel: 36/40/44/48

Core Frequency: 5150-5350MHz ; 5470-5725MHz; 5725-5850MHz ; 5850-5925MHz

(The specific frequency bands utilized are upon the legal regulations by each country)

Bandwidth: Support 20MHz, 40MHz, 80Mhz

Transmitter power: 13dBm

SW version:

TX: 4.2.5

RX: 3.2.1

HW version:

TX: V30TX-VPLAY-02

RX: V30RX-LC01-01

Disclaimer

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Hereby ASSMANN Electronic GmbH declares that the Declaration of Conformity is part of the shipping content. If the Declaration of Conformity is missing, you can request it by post under the below mentioned manufacturer address.

www.assmann.com

Assmann Electronic GmbH
Auf dem Schüffel 3
58513 Lüdenscheid
Germany

